

10
YEAR
WARRANTY
Materials & Workmanship
INCLUDING
FREE WEIGHT IMPACT
(exclusive to Infinity Max)

INFINITY[®] **MAX**

The Ultimate in
Weight Room Flooring

INFINITY
MAX



Texas Tech University



Duke University


Features

- 10 year Warranty
- Custom Colors
- Custom logos produced in Pantone colors
- Easier to Clean and Maintain
- Easier to Install
- Non-Slip Wet or Dry
- Earn up to 8 LEED Points
- TPV surface has superior color consistency
- Patented KrosLOCK connection



Now Perform **Power Cleans** Directly on the Floor

Tested with over 400,000 repeated impacts with an 800 lb force

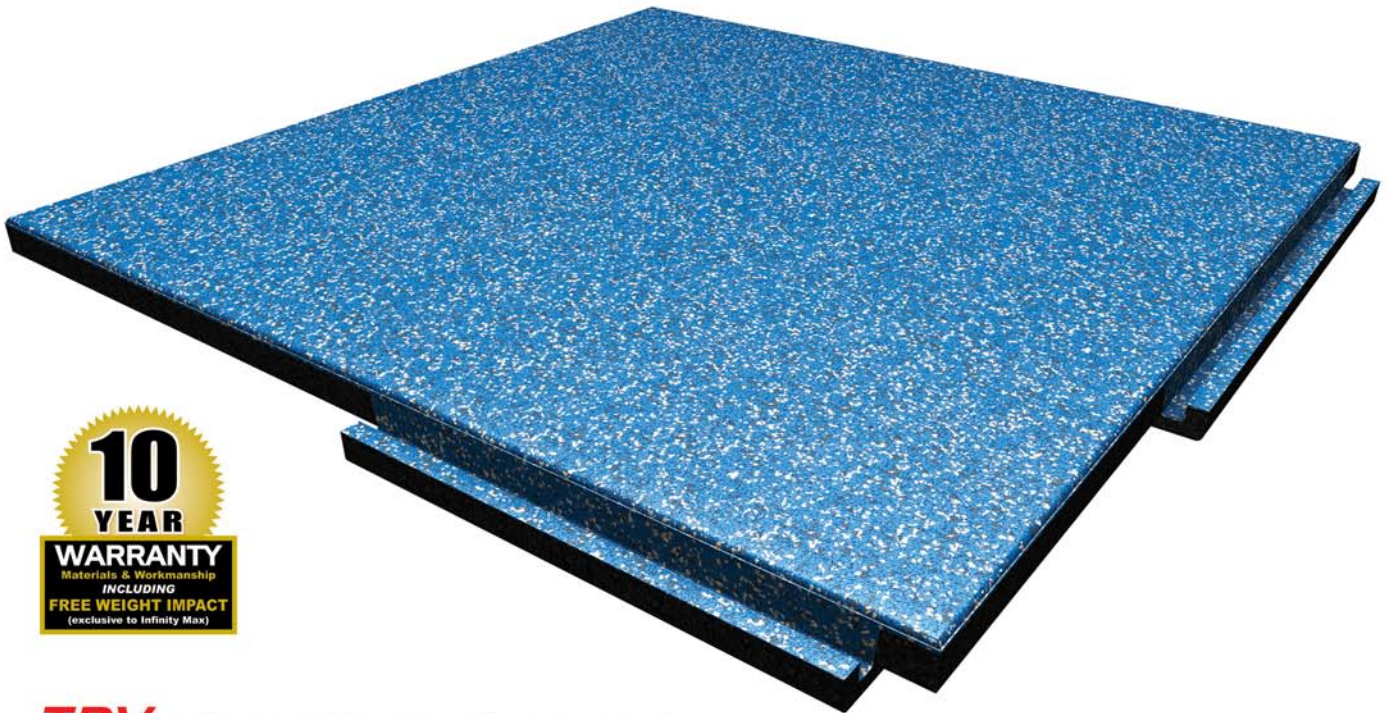

TPV (ThermoPlastic Vulcanisate)

INFINITY MAX now utilizes TPV on the surface of the tile. This premium polymer has been developed to incorporate the best qualities of EPDM, but has much better UV resistance, superior color consistency and is 20% more durable. TPV is much easier to clean and keep clean.

Color Consistency with TPV is Superior. We can virtually guarantee the color consistency of Infinity Max. Every tile will be the same color with no variation.

Exclusive Design




Standard Colors

INFINITY MAX® offers 10 standard color combinations. For assistance with choosing the right color for your venue contact us at 1-888-479-1017 or visit us online at www.InfinityFlooring.com. Looking for more choices? Be sure and see our Custom Color Options in this brochure and online.


(Note: This is a graphic representation. The actual product may differ slightly)




Black

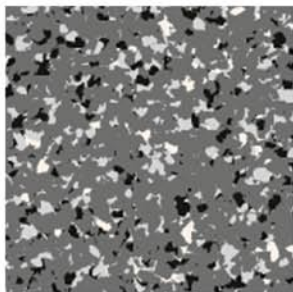


Bed Rock

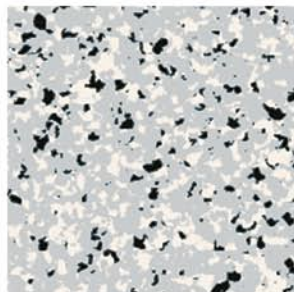


Granite

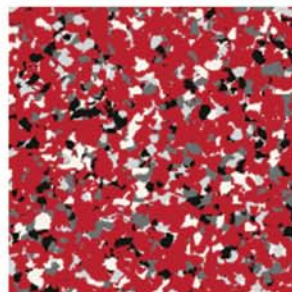


Fire Brick

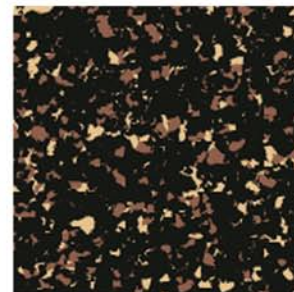


Java

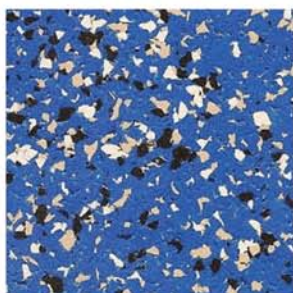


Blue Sand

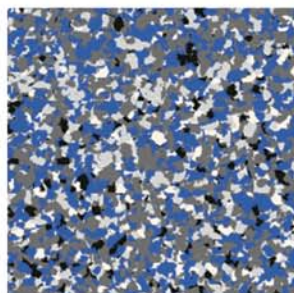


Blue Steel

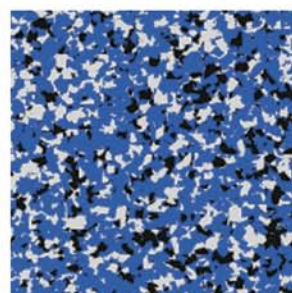

Blue Ice

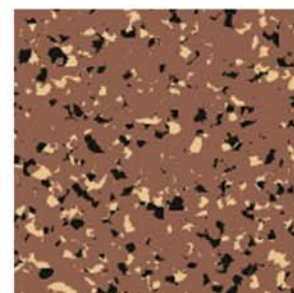

Dark Sand

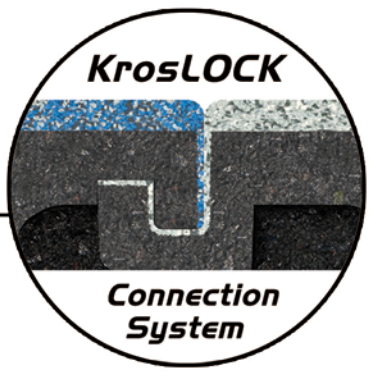


KrosLOCK

Connection System

**Industry Leading
1.25" Thick Tiles
for Extreme Impact**

**Non-Slip Surface
Wet or Dry**

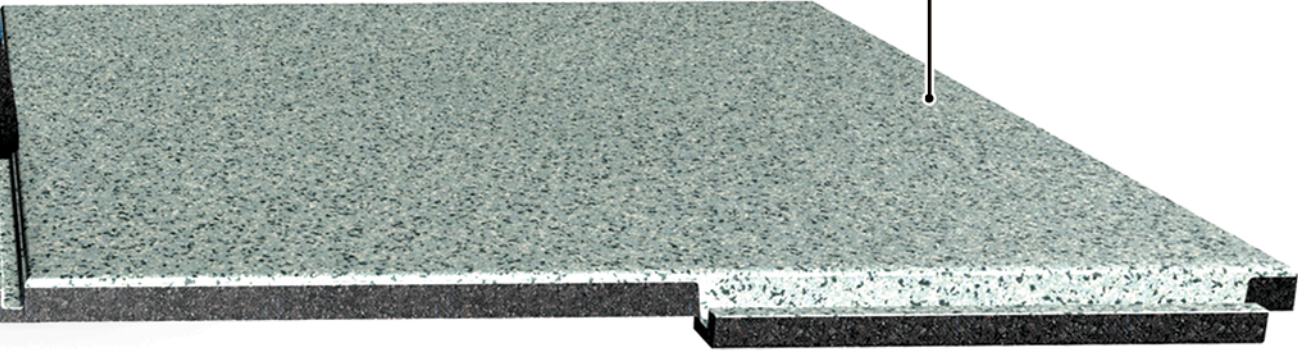


Installation

The **INFINITY MAX**® system is installed without adhesive. The tiles are joined together with a patented KrosLOCK connection system and compressed tightly against the perimeter walls. The tiles can be easily disassembled if the tiles need to be removed or replaced. Transition ramps are available to allow for a gradual transition from 1.25" down to the surrounding surface.


INFINITY MAX may be installed directly over newly cured concrete just as soon as it can be walked on, regardless of the moisture content. This allows your facility to open on schedule without delays while waiting for the concrete moisture content to fall to a specified level.

INFINITY MAX is installed by factory approved contractors or Infinity Performance's own expert installers which are the best in the industry. They travel throughout the United States providing our clients with professional installations that enhance the quality and character of every weight room.

Transition Ramps

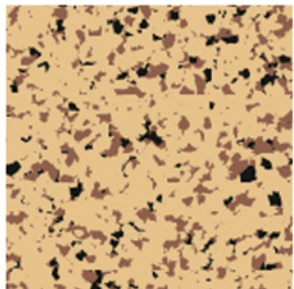


Light Sand

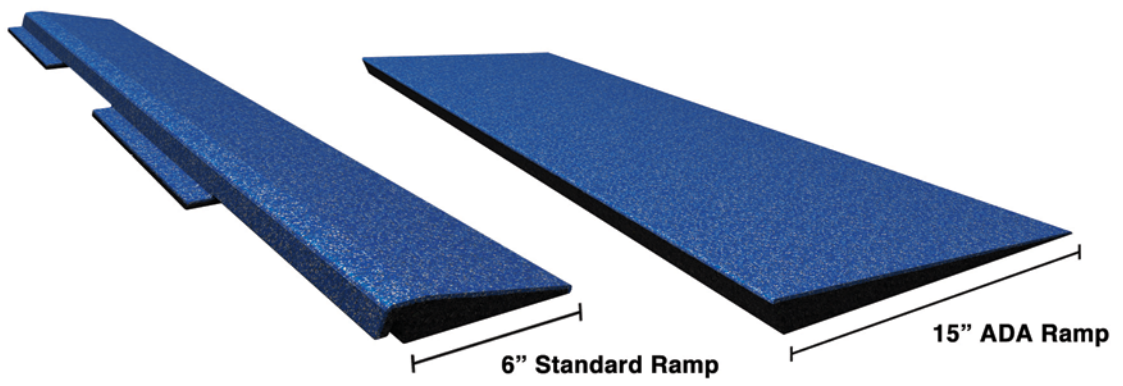

Custom TPV Colors

Our Custom Color capability allows us to create colors that are unique to your facility. Please contact us for assistance in creating your very own custom color or you may simply choose 2 or 3 different colors from the palette below and specify the percentage of each color in 5% increments. The dominant color should not be greater than 80% and you must allow a minimum of 10% black for production purposes. Once your Custom Color is created we can email a digital file to you for your review and then produce an actual rubber sample for final approval.

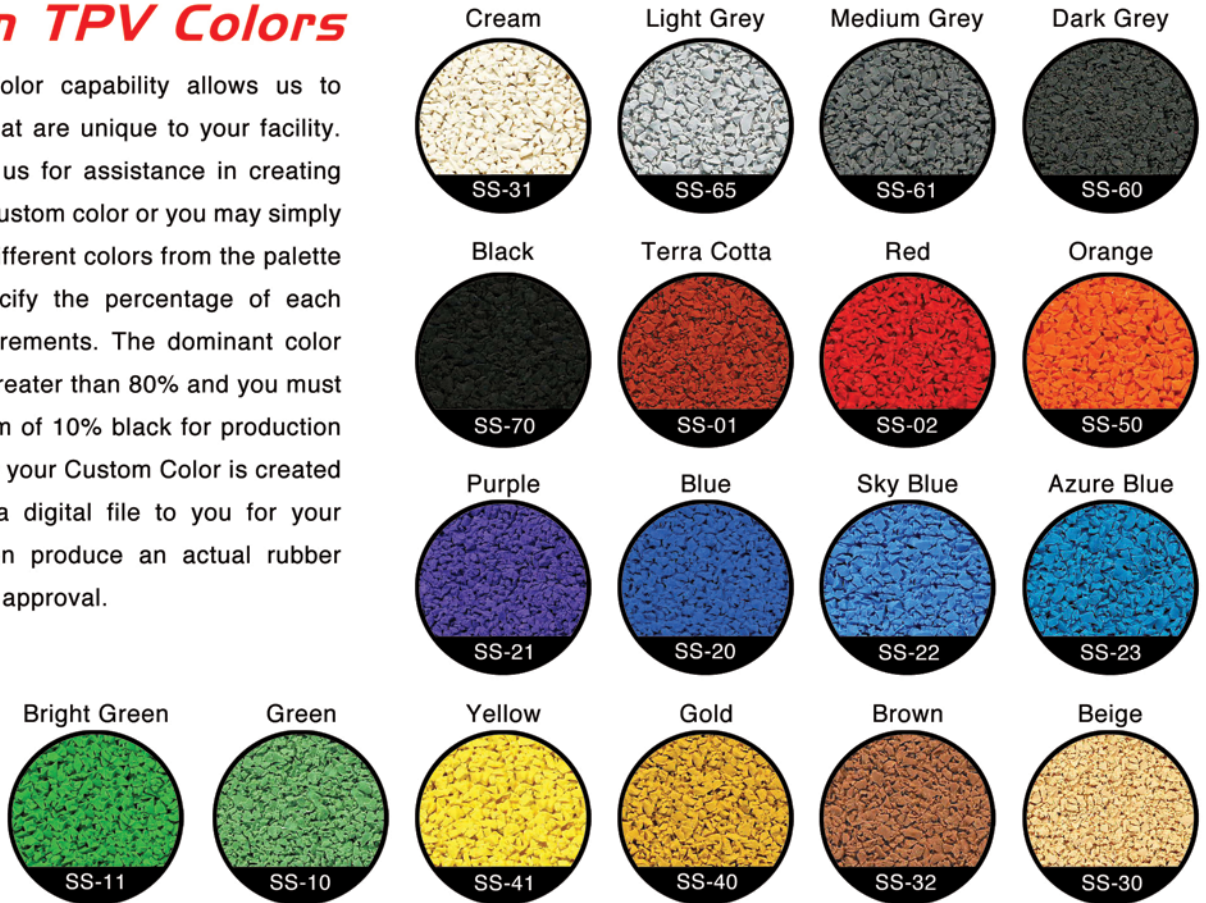

Custom Color Equation

Thanks to our amazing array of Vivid TPV colors, you can create your very own Custom Color Infinity Max® tile. The finished product is only limited by your imagination! The possibilities are endless! Visit www.Infinityflooring.com to use our new interactive Custom Tile Rendering Program.



Our Clients

Collegiate

University of Kansas	University of Alabama-UAB	Syracuse University	Wittenberg University
University of Michigan	University of Virginia	Purdue University	Xavier University
University of Southern Cal.	University of LaVerne	Rutgers State University	Rice University
University of Notre Dame	University of Richmond	Georgetown College	Baylor University
University of North Carolina	University of Maine	Texas Christian University	Ball State University
University of Connecticut	University of Missouri	Kansas State University	Providence College
University of Kentucky	University of California (Irvine)	Western Kentucky University	Slippery Rock University
University of Florida	Florida State University	Olivet Nazarene University	Guilford College
University of Oklahoma	Duke University	Michigan Tech University	Emory University
University of Arkansas	The Ohio State University	Bowling Green State University	Valdosta State University
University of Nebraska	Penn State University	Siena Heights University	Tulane University
University of Houston	Miami University-Oxford	Butler County Comm. College	Iona College
University of Louisville	Stanford University	Sacramento State University	Wilkes University
University of Miami	Texas Tech University	Collin County Community College	Florida Atlantic University
University of Arizona	Duke University	Northwood University	Cal State Longbeach
University of Akron	DePaul University	William Patterson University	Auburn University
University of New Hampshire	Bradley University	Jarvis Christian College	Cecil College
University of Edinburgh	Nova Southeastern University	South Dakota State University	Loyola College in Maryland

Training & Fitness Facilities

Orlando Magic	5 Off 5 On - Pit Instruction Training
San Diego Chargers	U.S. Ski & Snowboard Association
Boston Celtics	YMCA
Pittsburgh Steelers	Belmont Athletic Club
United States Tennis Association	Carmel Valley Athletic Club
International Performance Institute	Casa Grande Performance
Richard Childress Racing	Moore Rehabilitation Center

Spartanburg Regional Health Care
Surfside Wellness Center
Elmwood Fitness Center
Mid Valley Athletic Club
Hoffacker Health & Fitness
PT & Fitness Plus, Inc.
Deveau's Gymnastics

Government

U.S. Armed Forces
United States Army
United States Navy
United States Marines
Homeland Security
Federal Bureau of Investigation
Naval Academy Prep School

High Schools

Aloha High School	Bishop Verot High School	St. Xavier High School	Woodbridge High School
Archbishop Moeller High School	Father Judge High School	Union High School	Brookings-Harbor High School
Bergen Catholic High School	Lubbock Monterey High School	Dublin County High School	St. John Neumann School
Bishop Chatard High School	Silverton High School	Seneca High School	Episcopal School of Dallas
			Santa Margarita High School

Please visit www.infinityflooring.com
for our most current client list

Specifications

Physical Specification: INFINITY MAX® configurations consist of an interlocking, dual durometer flooring system consisting of a high density wear layer surface permanently molded to an underlayment incorporating 64 pedestals per tile to maximize shock absorbency and traction underfoot in wet and dry conditions as well as an omni-directional locking design to promote ease of installation.

Component Specification: INFINITY MAX® is a factory molded modular surfacing system composed of high quality TPV (ThermoPlastic Vulcanisate) rubber granules bound in both underlayment and wear surface with a wear and weather resistant polyurethane. Rubber granules in both wear surface and underlayment are specially blended to enhance tile strength, durability and energy absorption characteristics.

Tile Construction: INFINITY MAX®

1. Evenly distributes fitness equipment weight over 64 pedestals per tile
2. Omni-Directional Locking Design: Locks the system firmly in place without adhesive
3. Wear Layer: High compression wear layer
Type: Virgin TPV rubber granules.

INFINITY MAX® TILE SPECIFICATION

Product Data

Dimensions (78° F.):	1.25" Thick, 23.75" x 23.75" ± 1/8"
Wear Surface Density	90 lb./ft ³ min.
Coefficient of Thermal Expansion	1.1 x 10 ⁻³ in/ft/°F
Weight	21.5 lbs./tile or 5.3 lb./ft ²

Physical Data Test

ASTM

Tensile Strength	D412	107 lb/in ² min
Elongation at Break	D412	165% minimum
Compression Deflection	D1667	29.5 lb/in ² to 25% Compression
Compression Set	D395	4.37% Permanent Set
Impact Insulation Class	E49	> 50
Tear Resistance	D624	33.1 lb./in ² min.
Slip Resistance	E303	Dry: 102, Wet: 62
Coefficient of Friction	D2047	Dry: 0.81, Wet: 0.82
Noise Reduction Coefficient	C423	0.10 sabine/ft ²
Rubber Deterioration / Air Oven	573	No Deterioration
Flammability (Burning Pill Test)	D2859	Passed
Critical Radiant Flux	E648	Class II - .34

Installation: INFINITY MAX® may be installed indoors over most concrete, wood or tile floors. The substrate over which INFINITY MAX® is installed must be level, in good condition, and clear of dirt and loose debris. Cracks greater than 1/8" should be filled. Outdoor installations may be installed over concrete or asphalt.

Please follow the published manufacturers recommended installation procedures. For complete design and installation information, please contact Infinity Performance, Inc. at 888-479-1017 or visit our web site at www.infinityperformance.com.

Maintenance: Buckeye Blue™ and Taski™ Floor care and maintenance products, available nationally, offer simple and reliable protection and performance. For more detailed information, please refer to the INFINITY MAX® Maintenance Instructions.

Warranty: INFINITY MAX® is warranted for a period of 10 (ten) years against premature deterioration, manufacturer's defects as well as any damage whatsoever to the INFINITY MAX® material due to dropping free weights directly on the INFINITY MAX®.

Read the Fine Print!



INFINITY MAX® Exclusive 10 year Warranty



Seller warrants that the material will not prematurely deteriorate to the point of failure for a period of ten (10) years from the date of issue if maintained and used for the purpose for which the Seller intended. Seller further warrants that any damage to the INFINITY MAX material due to dropping free weights on the INFINITY MAX will be covered under this warranty for a period of ten (10) years.

(INFINITY MAX is the only product on the market that warrants against damage from free weights)



From:
INFINITY
Performance
above and beyond

Phone: 317.479.1017
 Toll Free: 888.479.1017
 Fax: 317.479.1018
www.InfinityFlooring.com



LEED